

Filters should be installed in teams of 2 or 3 installers, with 1 or 2 installers on the floor unpacking the filters, as they are needed. The filters should then be handed to the filter installers, who work on scaffolding or ladders (as applicable).

WARNING!

EXTREME CAUTION SHOULD BE TAKEN TO AVOID CONTACT WITH MEDIA

Touching filter media will result in damage to the media that will affect the performance of the filter

Damage to filters occurring during or after installation and leak qualification testing failures. The filters supplied by Keystone have been 100% tested and certified by the manufacturer to be free of defects and leaks. Keystone cannot accept responsibility for damage that occurs after shipment, whether through transit, handling or installation, and will not replace filters under our standard warranty.

STEP 1: Unpack filter



A) Place filter box on floor, careful to set box in correct orientation, as per the arrow.



B) Remove filter from box being careful not to touch filter media.




C) Place the filter gently on the floor, remove the tape, and take the filter out of the bag.



D) Place filter on a flat, clean, protecting surface with the expanded face screen on the bottom.

STEP 2: Installing the filter

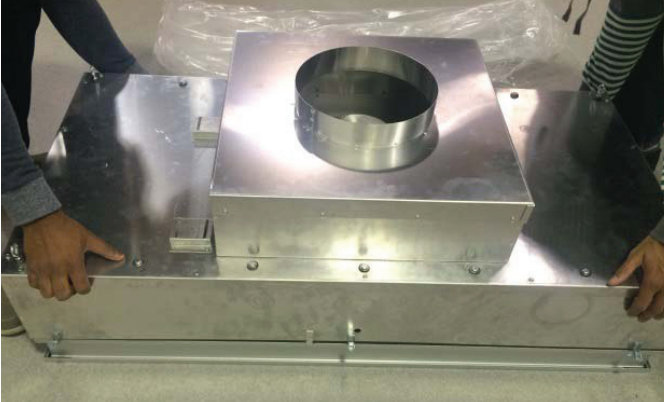

A) Place Krown Fan Filter Unit top cap assembly onto filter's gasketed flange/frame, being careful to not damage the filter media.



B) Attach filter to top cap assembly by hooking and securing latches. Gasket may need to be compressed to grab channel with latch.

**FOR PRODUCT SUPPORT OR FOR REORDERING NEW FILTERS, PLEASE CONTACT THE KEYSTONE SUPPORT TEAM
BY PHONE: (470)-702-9560 OR BY EMAIL: KEYSUPPORT@KEYSTONECLEANAIR.COM
To reorder new filters, please contact your local Keystone Sales Representative at www.KeystoneCleanAir.com/contact**